

POWERED BY PHILIPS LED MODULES



Features

- Powered by high output PHILIPS LED.
- Constant Voltage.
- Integrated transparent 170° optic lens.
- 30/20 pcs per string.
- CE, RoHS, UL, TUV, BIS, CB and LM-80 certified.

Application

- Apply to 6–15 cm depth signs at airports, metros, banks, buildings and shopping malls, etc.

Parameters

Items	Parameters			
Part Number	ZE01QAW	ZE02QAW	ZE03QAW	ZE04QAW
CCT (K)	6500K	6500K	6500K	6500K
Beaming Angle (°)	170°	170°	170°	170°
CRI (Ra)	≥75	≥75	≥75	≥75
Luminous Flux (lm)	60	110	165	180
Voltage (V)	DC12	DC12	DC12	DC12
Power (W)	0.36	0.72	1.08	1.2
Driving Method	Constant Voltage	Constant Voltage	Constant Voltage	Constant Voltage
Dimension (mm)	17.4*23*9.6	52*18.5*9.6	78*18.5*9.6	42.1*42.1*9.6
Working Tem. (°C)	-25 ~ +60	-25 ~ +60	-25 ~ +60	-25 ~ +60
Storage Tem. (°C)	-25 ~ +70	-25 ~ +70	-25 ~ +70	-25 ~ +70
Protection Grade	IP66	IP66	IP66	IP66


Dimension

Unit: mm


ZE01QAW



ZE02QAW

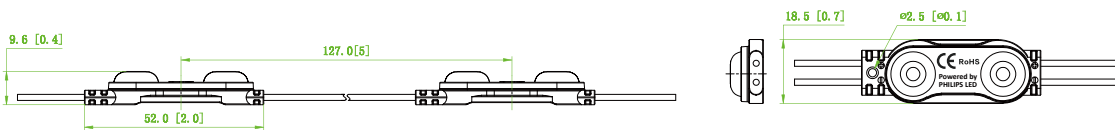

ZE03QAW

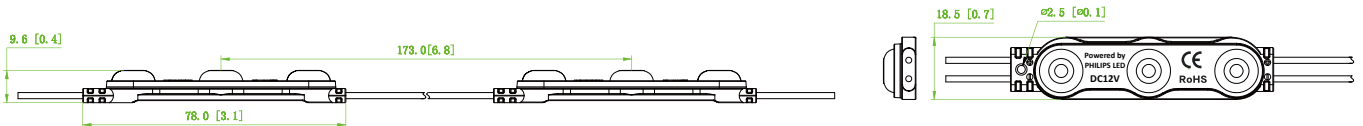

ZE04QAW

